
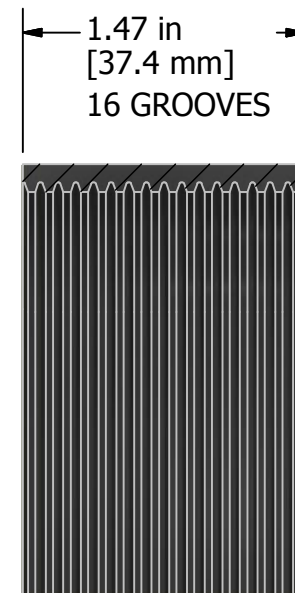


BACKSIDE GROUND FOR CONSISTANT BELT THICKNESS.  
SMALL BEND RADIUS FOR NO AIR GAP WITH HIGH SPEED BELT DRIVES.

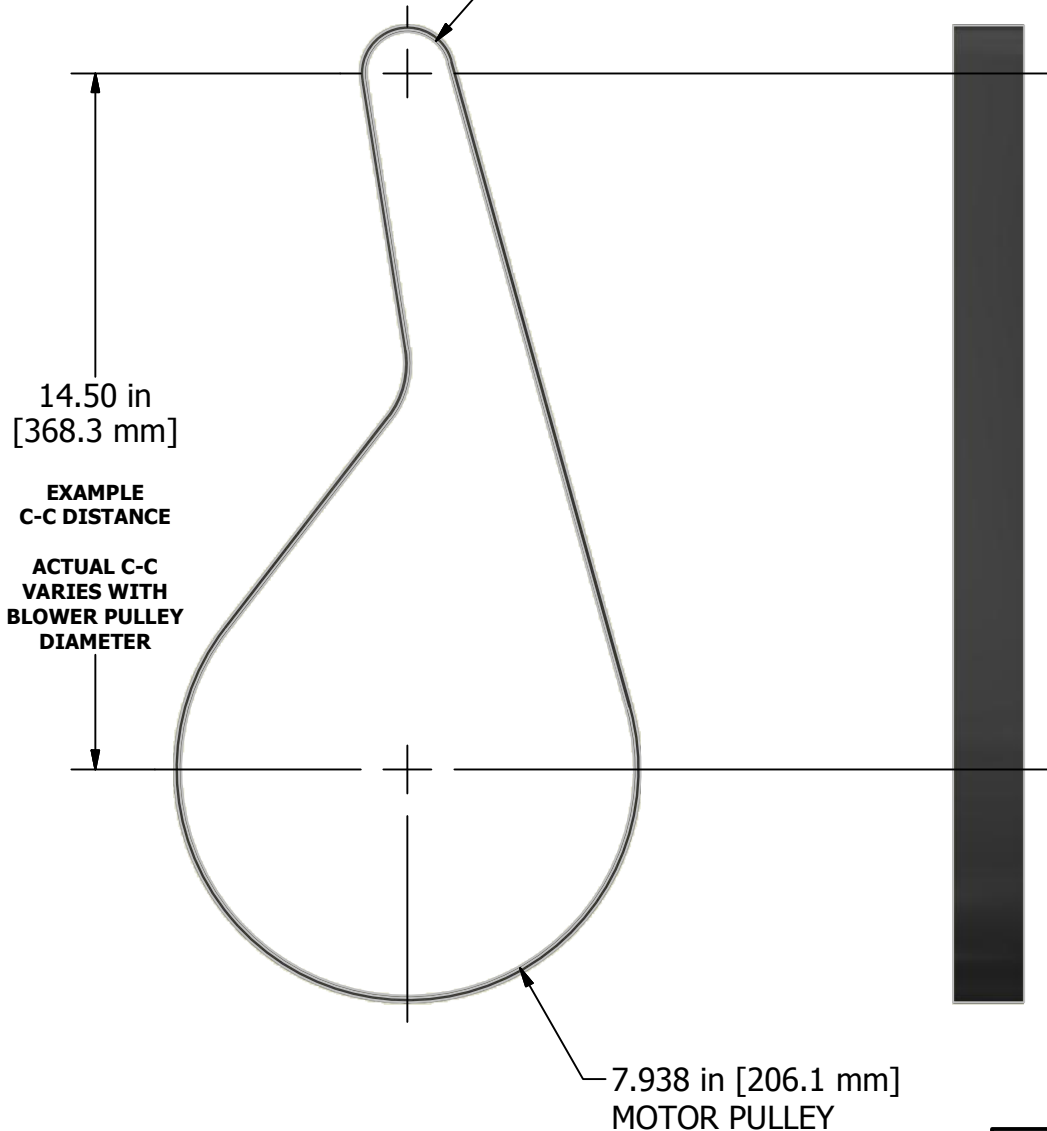

14.50 in  
[368.3 mm]  
**EXAMPLE  
C-C DISTANCE**  
**ACTUAL C-C  
VARIES WITH  
BLOWER PULLEY  
DIAMETER**

7.938 in [206.1 mm]  
MOTOR PULLEY

**ARAMIDE TENSILE CORD FOR HIGH  
STRENGTH AND VERY LOW STRETCH.**

**NEOPRENE RUBBER FOR HIGH GRIP,  
FLEXABILITY, AND LONG BELT LIFE.**

WT: 0.5lbs [0.23 kgs]

THIS DOCUMENT IS THE PROPERTY OF PAXTON PRODUCTS AND IS FURNISHED ON THE CONDITION THAT IT IS TO BE USED ONLY BY PAXTON CUSTOMERS FOR INTEGRATING PAXTON EQUIPMENT. THIS DOCUMENT MAY BE USED BY CUSTOMERS TO CREATE THEIR OWN EQUIPMENT DOCUMENTATION. OTHERWISE THIS DOCUMENT IS NOT TO BE USED IN ANY SHAPE OR FORM TO CREATE DOCUMENTS, PARTS, OR EQUIPMENT.



10125 Carver Road Phone: (800) 441-7475  
Cincinnati, OH 45242 (513) 891-7474  
www.paxtonproducts.com

**BELT, 16GRV, POLY-RIB, 460 LG**  
**PAXTON COMPOSITE CONSTRUCTION**

DATE  
3/31/2010

INVENTOR DWG No.

**CS-8001460**