
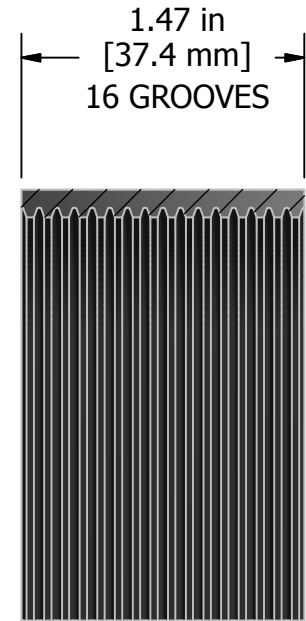


**BACKSIDE GROUND FOR CONSISTANT BELT THICKNESS.
SMALL BEND RADIUS FOR NO AIR GAP WITH HIGH SPEED BELT DRIVES.**

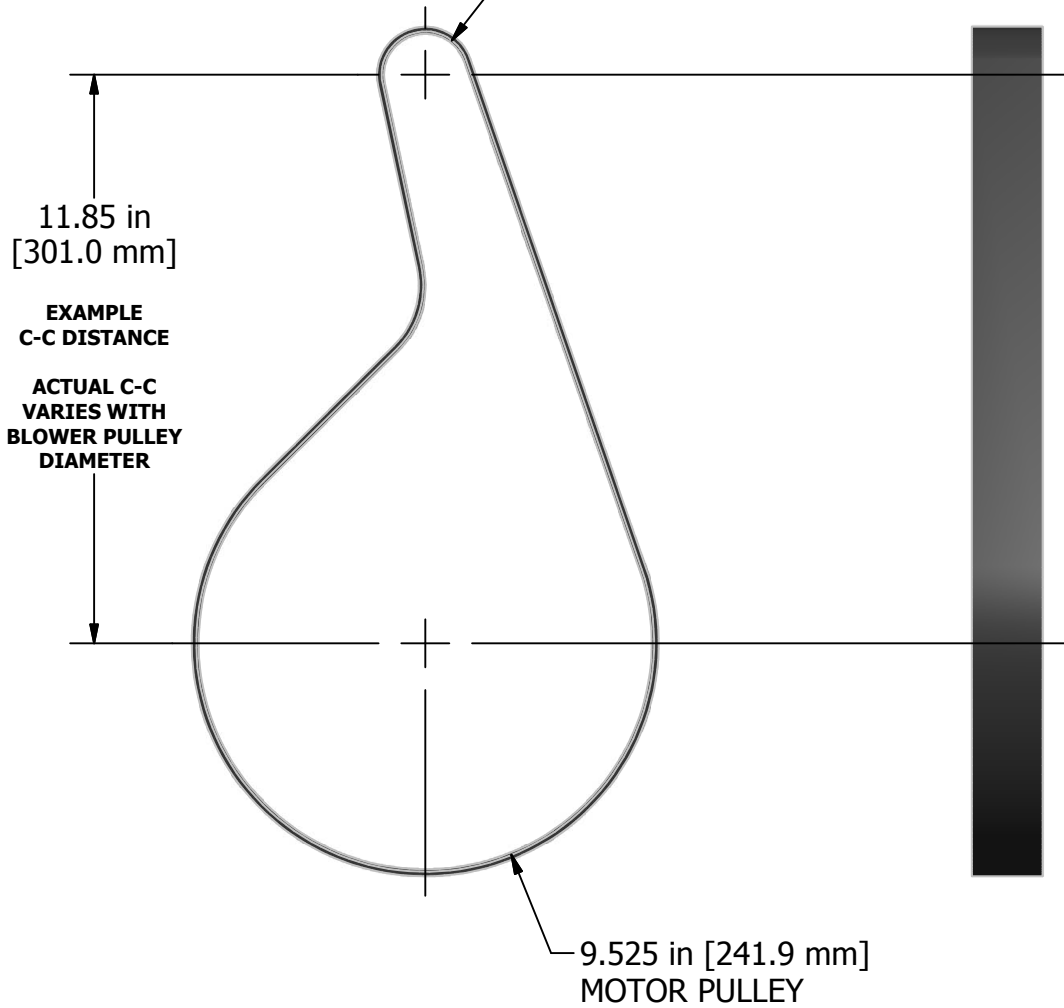

ARAMIDE TENSILE CORD FOR HIGH STRENGTH AND VERY LOW STRETCH.

NEOPRENE RUBBER FOR HIGH GRIP, FLEXABILITY, AND LONG BELT LIFE.

WT: 0.5lbs [0.23 kgs]

THIS DOCUMENT IS THE PROPERTY OF PAXTON PRODUCTS AND IS FURNISHED ON THE CONDITION THAT IT IS TO BE USED ONLY BY PAXTON CUSTOMERS FOR INTEGRATING PAXTON EQUIPMENT. THIS DOCUMENT MAY BE USED BY CUSTOMERS TO CREATE THEIR OWN EQUIPMENT DOCUMENTATION. OTHERWISE THIS DOCUMENT IS NOT TO BE USED IN ANY SHAPE OR FORM TO CREATE DOCUMENTS, PARTS, OR EQUIPMENT.



10125 Carver Road Phone: (800) 441-7475
Cincinnati, OH 45242 (513) 891-7474
www.paxtonproducts.com

**BELT, 16GRV, POLY-RIB, 440 LG
PAXTON COMPOSITE CONSTRUCTION**

DATE
3/31/2010

INVENTOR DWG No.

CS-8001491