


Paxton Two Stage Replacement Silencer Cartridge

MODEL # 1500-Silencer

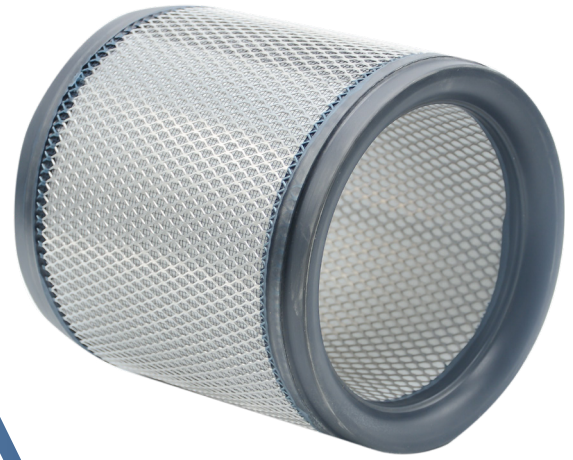

Item Number	1500-Silencer	
Description	Replacement Silencer Cartridge	
Fits blowers	PX-Series	
Weight	2 lbs	0.9 kg
Dimensions		
Length	8 1/4 in	210 mm
Diameter	7 7/8 in	200 mm

Recommended Replacement Frequency

Paxton part	1 or 2 shifts/day operation	3 shifts/day operation
Belts	12 months	6 months or 4000 hours
Belt Springs	12 months	6 months or 4000 hours
Tensioners	24 months	12 months
Filters	Filters must be changed as often as needed to maintain blower or system performance as measured by increased pressure drop across the filter. The filter must be changed if the pressure drop exceeds 10" of water column. Filter change frequency will vary widely based on environmental and atmospheric conditions. Minimum recommended filter change frequency is every 12 months for 1 or 2 shift/day operation; and every 6 months for 3 shift/day operation.	
Silencer	Inspect when replacing filters. Change annually in typical applications. In harsh or high humidity environments, change every 2000 hours.	

